NOTES

All dimensions in millimetres.


Kerbs details to comply with BS.EN.1340:2003.

Kerb size 125mm x 200mm.

Kerbs to be hydraulically pressed.

Kerbs to be laid and bedded on a layer of Class (i) mortar not less than 10mm and not more than 40mm thick.

All joints to be filled with Class (i) mortar and pointed.

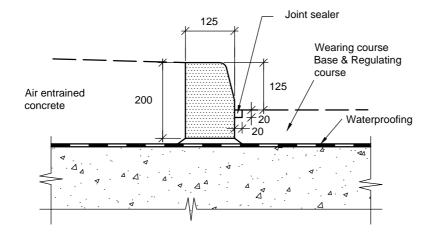

PLACE MANAGEMENT

INFRASTRUCTURE

TRANSPORT DESIGN

AND DELIVERY