


NOTES

All dimensions in millimetres.


Foundations shall be 150mm Ø Arcon Ultracrete Post Fix or similar approved.

All joints shall be continuously welded with a minimum throat thickness of 5mm.


Stand shall be fabricated from Grade 304 dull polished stainless steel or from mild steel, galvanized to BS EN ISO 1461:2009.

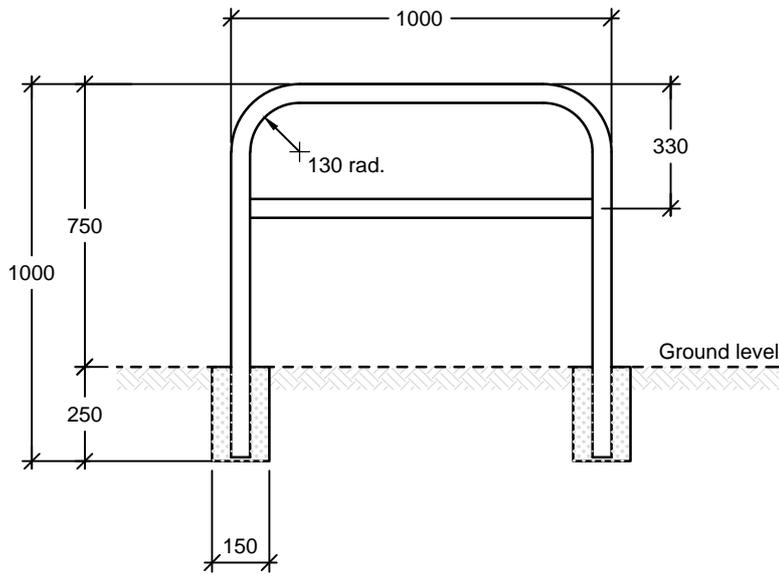

ELEVATION

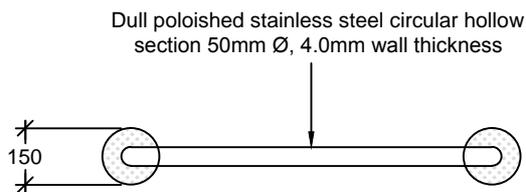

PLAN

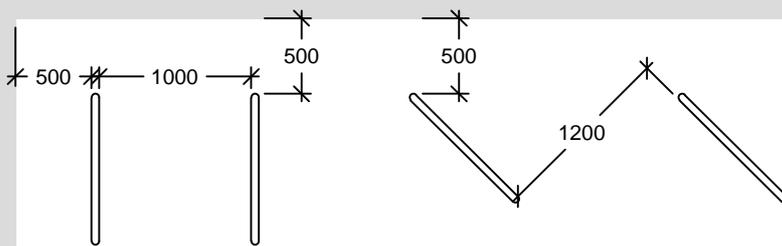

LAYOUT 1



LAYOUT 2